

INDOOR


SOSPENSIONE / SUSPENSION

POLY ESAGONO



- Alluminio


- Aluminum

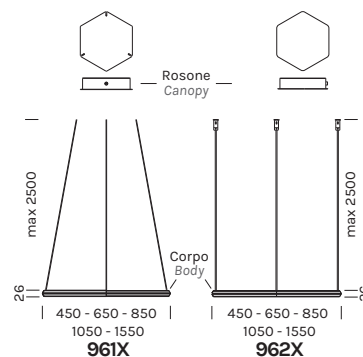

Con rosone e driver, cavi inclinati / With canopy and driver, slanted cables



9610	M 2700K	W 3000K
Potenza/ Power	2x17.3W	2x17.3W
Nominal lumen	2x1896lm	2x2076lm
CRI	>94	>94
Alimentazione/ Supply	220-240V	220-240V




Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9610	M	-BV	-BR
composed by	W	-OR	-OR
RS54 (1Pz)			
9600 (1Pz)			

Con rosone e driver, cavi inclinati / With canopy and driver, slanted cables




9611	M 2700K	W 3000K
Potenza/ Power	2x25.9W	2x25.9W
Nominal lumen	2x2844lm	2x3114lm
CRI	>94	>94
Alimentazione/ Supply	220-240V	220-240V



Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9611	M	-BV	-BR
composed by	W	-OR	-OR
RS54 (1Pz)			
9601 (1Pz)			


Con rosone e driver, cavi inclinati / With canopy and driver, slanted cables


9612	M 2700K	W 3000K
Potenza/ Power	2x34.6W	2x34.6W
Nominal lumen	2x3792lm	2x4152lm
CRI	>94	>94
Alimentazione/ Supply	220-240V	220-240V



Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9612	M	-BV	-BR
composed by	W	-OR	-OR
RS54 (1Pz)			
9602 (1Pz)			

Con rosone e driver, cavi inclinati / With canopy and driver, slanted cables



9617	M 2700K	W 3000K
Potenza/ Power	2x43.2W	2x43.2W
Nominal lumen	2x4740lm	2x5190lm
CRI	>94	>94
Alimentazione/ Supply	220-240V	220-240V



Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9617	M	-BV	-BR
composed by	W	-OR	-OR
RS55 (1Pz)			
9607 (1Pz)			

Con rosone e driver, cavi inclinati / With canopy and driver, slanted cables



9618	M 2700K	W 3000K
Potenza/ Power	2x64.8W	2x64.8W
Nominal lumen	2x7110lm	2x7785lm
CRI	>94	>94
Alimentazione/ Supply	220-240V	220-240V



Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9618	M	-BV	-BR
composed by	W	-OR	-OR
RS55 (1Pz)			
9608 (1Pz)			


Con rosone e driver, cavi inclinati / With canopy and driver, slanted cables


9613	M 2700K	W 3000K
Potenza/ Power	2x17.3W 2x25.9W 2x34.6W	2x17.3W 2x25.9W 2x34.6W
Nominal lumen	2x1896lm 2x2844lm 2x3792lm	2x2076lm 2x3114lm 2x4152lm
CRI	>94	>94
Alimentazione/ Supply	220-240V	220-240V



Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9613	M	-BV	-BR
..... composed by	W	-OR	-OR
RS40 (1Pz)			
9600 (1Pz)			
9601 (1Pz)			
9602 (1Pz)			

Con rosone e driver, cavi dritti / With canopy and driver, straight cables



9620	M 2700K	W 3000K
Potenza/ Power	2x17.3W	2x17.3W
Nominal lumen	2x1896lm	2x2076lm
CRI	>94	>94
Alimentazione/ Supply	220-240V	220-240V



Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9620	M	-BV	-BR
..... composed by	W	-OR	-OR
RS52 (1Pz)			
9600 (1Pz)			

Con rosone e driver, cavi dritti / With canopy and driver, straight cables



9621	M 2700K	W 3000K
Potenza/ Power	2x25.9W	2x25.9W
Nominal lumen	2x2844lm	2x3114lm
CRI	>94	>94
Alimentazione/ Supply	220-240V	220-240V



Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9621	M	-BV	-BR
..... composed by	W	-OR	-OR
RS52 (1Pz)			
9601 (1Pz)			


Con rosone e driver, cavi dritti / With canopy and driver, straight cables


9622	M 2700K	W 3000K
Potenza/ Power	2x34.6W	2x34.6W
Nominal lumen	2x3792lm	2x4152lm
CRI	>94	>94
Alimentazione/ Supply	220-240V	220-240V



Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9622	M	-BV	-BR
..... composed by	W	-OR	-OR
RS52 (1Pz)			
9602 (1Pz)			

Con rosone e driver, cavi dritti / With canopy and driver, straight cables



9627	M 2700K	W 3000K
Potenza/ Power	2x43.2W	2x43.2W
Nominal lumen	2x4740lm	2x5190lm
CRI	>94	>94
Alimentazione/ Supply	220-240V	220-240V



Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9627	M	-BV	-BR
..... composed by	W	-OR	-OR
RS38 (1Pz)			
9607 (1Pz)			

Con rosone e driver, cavi dritti / With canopy and driver, straight cables


9628	M 2700K	W 3000K
Potenza/ Power	2x64.8W	2x64.8W
Nominal lumen	2x7110lm	2x7785lm
CRI	>94	>94
Alimentazione/ Supply	220-240V	220-240V




Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9628	M	-BV	-BR
..... composed by	W	-OR	-OR
RS38 (1Pz)			
9608 (1Pz)			

Con rosone e driver, cavi dritti / With canopy and driver, straight cables



9623	M 2700K	W 3000K
Potenza/ Power	2x17.3W 2x25.9W 2x34.6W	2x17.3W 2x25.9W 2x34.6W
Nominal lumen	2x1896lm 2x2844lm 2x3792lm	2x2076lm 2x3114lm 2x4152lm
CRI	>94	>94
Alimentazione/ Supply	220-240V	220-240V



Articolo Item	Temperatura Temperature	Rosone Canopy	Corpo Body
9623	M	-BV	-BR
composed by	W	-OR	-OR
RS41 (1Pz)			
9600 (1Pz)			
9601 (1Pz)			
9602 (1Pz)			